


CLASS III TRAILER HITCH  
**R3-0526**  
TOYOTA GRAND HIGHLANDER

TOOLS REQUIRED:  
DRILLS: None  
WRENCHES: Torque Wrench, Ratchet, Flat Screwdriver  
SOCKETS: 17MM

HITCH RATING: 5,000 LBS. WEIGHT CARRYING, 500 LBS. TONGUE WEIGHT / NOT RATED FOR WEIGHT DISTRIBUTING  
WARNING: CONSULT VEHICLE OWNERS MANUAL FOR TOWING RECOMMENDATIONS. DO NOT EXCEED VEHICLE'S RECOMMENDED TOWING CAPACITY. THIS PRODUCT IS DESIGNED FOR TRAILER TOWING ONLY AND SHOULD NOT BE USED FOR ANY OTHER PURPOSE.

NOTE: INSTALL PARTS LOOSELY UNTIL ALL ATTACHMENTS HAVE BEEN MADE TO VEHICLE

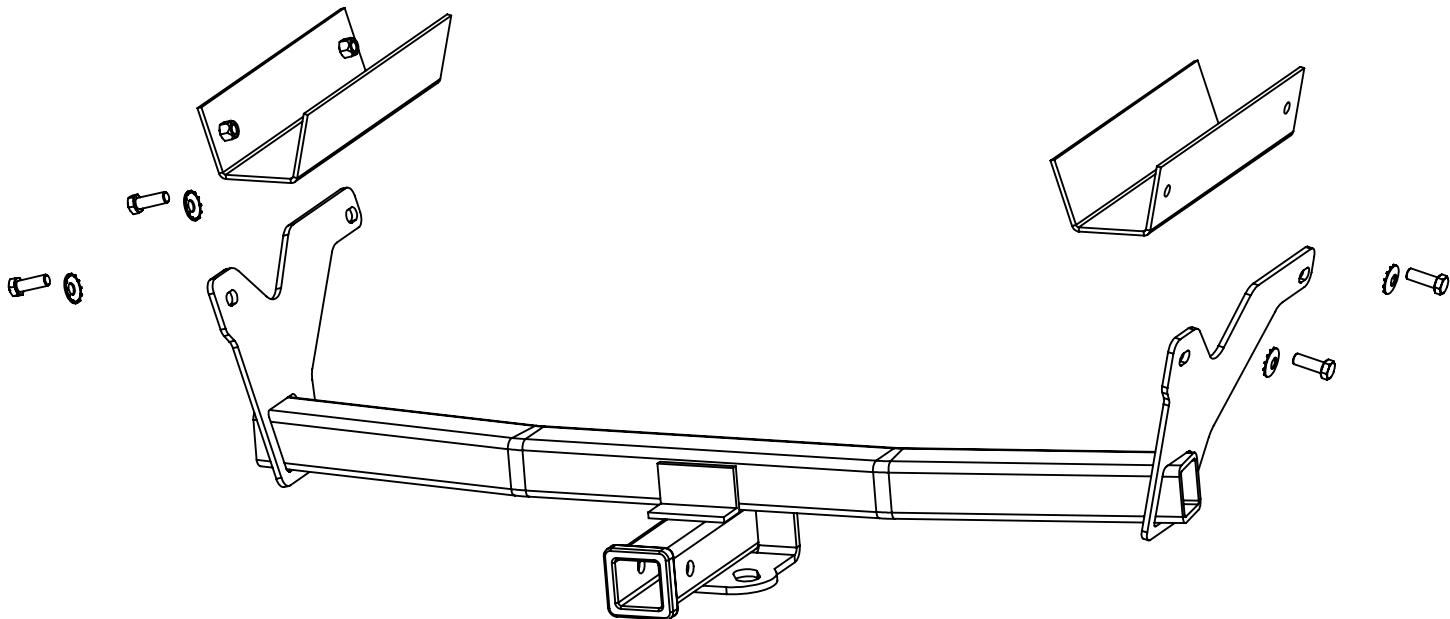

1. Locate and remove the two plastic weld nut plugs in the outside vertical surface of frame rail on both the passenger and driver's side using a small flat screwdriver. Return the four plugs to the vehicle owner.
2. Raise the hitch into position aligning the mounting slots in the hitch with the four weld nuts in the frame rails. Secure with the M12 hex bolts and conical washers provided. Note: the teeth of the conical washers go toward the hitch.
3. Torque all fasteners to 68 FT-LB.

**Hardware Kit:** (4) M12-1.25 x 30mm cl8 hex bolts      (4) 1/2" Conical Washers

**GIVE THIS INSTRUCTION SHEET TO VEHICLE OWNER**



THIS PRODUCT COMPLIES WITH SAFETY SPECIFICATIONS AND REQUIREMENTS FOR SAE AND VESC REGULATION V-5 FOR CONNECTING DEVICES AND TOWING SYSTEMS. DO NOT MODIFY THIS PRODUCT. INSTALL ONLY ON SPECIFIED VEHICLES IN GOOD CONDITION.



3301 WEST BURNSVILLE PARKWAY  
BURNSVILLE, MN 55337